

ESD 1719



1719-001

Gently Grey



1719-091

Ceilometer




1719-002

Plow Rock



1719-101

Light Coir

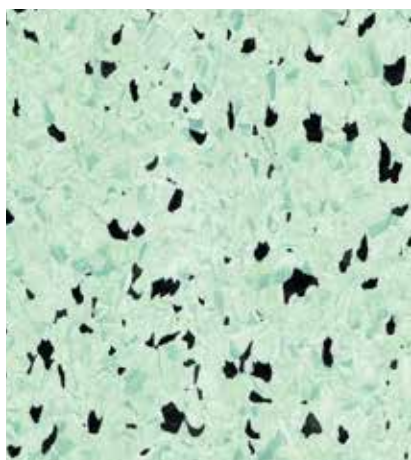

1719-502

Soft Green



1719-602

Peaceful

Conductive 2618



2618-012 Sesame



2618-513 Teasen



2618-601 Deep Sea

ESD 1618



2618-602 Deep Sky




1618-012 Sesame



1618-513 Teasen



1618-601 Deep Sea

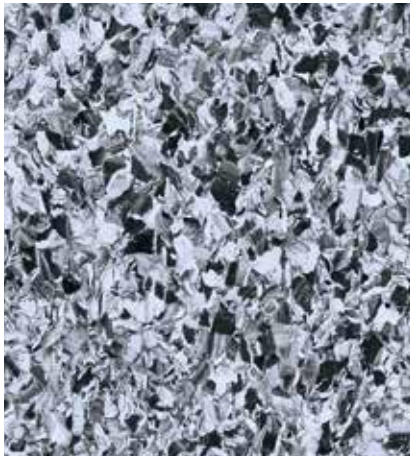

1618-602 Deep Sky

Technical Data

Structure	Standard	Unit	Contour Conductive	Contour ESD
Type of flooring	EN 649 / EN ISO 10581		Vinyl sheet with conductive backing	Vinyl sheet with conductive backing
Overall thickness	EN 428 / EN ISO 24346	mm	2	2
Sheet width / length	EN 426 / EN ISO 24341	m	2m/15-20m	2m/15-20m
Total weight	EN 430 / EN ISO 23997	g/m ²	3100g/m ²	3100g/m ²
Safety criteria				
Flammability	EN 13501-1	class	Bfl - s1	Bfl - s1
Slip resistance	DIN 51130	group	R9	R9
REACH Regulation No. 1907/2006	REACH 181		contains no substances mentioned in the SVHC-list	contains no substances mentioned in the SVHC-list

Performance				
Impact sound reduction	EN ISO 10140	dB	3	3
Residual indentation	EN 433 / EN ISO 24343	mm	0.05	0.05
Wear resistance	EN 649	group	P	P
Color fastness	ISO 105-B02	rating	≥ 6	≥ 6
Electrical resistance	EN 1081	Ω	1.0x10 ⁴ - 1.0x10 ⁶	≤ 1.0x10 ⁷
Static electrical propensity	EN 1815	kV	≤ 2.0	≤ 2.0
Thermal resistance	EN 12667	m ² K/W	0.04	0.04
Resistance to staining	EN 423 / EN ISO 26987		good resistance	good resistance
Castor chair	EN 425	Type W	Suitable	Suitable

Classification				
Domestic	IOS 10874-EN 685	class	23 heavy duty	23 heavy duty
Commercial	IOS 10874-EN 685	class	34 very heavy duty	34 very heavy duty
Industrial	IOS 10874-EN 685	class	43 heavy duty	43 heavy duty

Additional property				
Castor chair	✓	Antistatic behaviour	✓	
Underfloor heating	✓	Chemical resistance	✓	

www.armstrongflooring.asia

ARMSTRONG FLOORING OFFICES:

	TEL:	FAX:
Hong Kong	(852) 2585 7800	(852) 2598 7181
Singapore	(65) 6604 6836	(65) 6604 6835
Malaysia	(60) 379 323 331	(60) 379 606 331
Indonesia	(62) 21 2965 7866	(62) 21 2965 7867

